
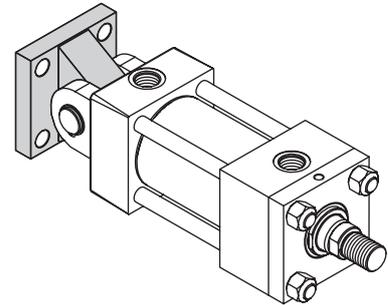



## Vertical male counterhinge

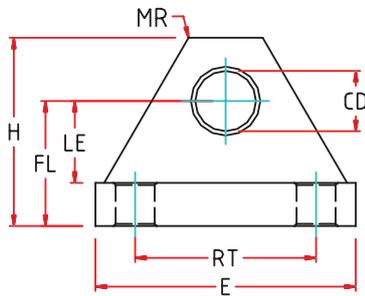

Bore $\varnothing$	Type	CB <sup>h13</sup>	CD <sup>H9</sup> $\varnothing$	E <sub>max</sub>	FL <sup>js4</sup>	H	HB $\varnothing$	LE <sub>min</sub>	Mr <sub>max</sub>	RT	Ordering code
25	PVM 25	12	10	40	23	33,4	5,5	13	12	28,3	0603025095
32	PVM 32	16	12	45	29	43,7	6,5	19	17	32,2	0603032095
40	PVM 40	20	14	60	29	43,7	9	19	17	41,7	0603040095
50	PVM 50	30	20	75	48	73	13,5	32	29	52,3	0603050095
63	PVM 63	30	20	90	48	73	13,5	32	29	64,3	0603063095
80	PVM 80	40	28	114	59	88,5	17,5	39	34	82,7	0603080095
100	PVM 100	50	36	126	79	122,3	17,5	54	50	96,9	0603100095
125	PVM 125	60	45	164	87	133	24	57	53	126	0603125095
160	PVM 160	70	56	198	103	154	30	63	59	155	0603160095
200	PVM 200	80	70	240	132	199,5	33	82	78	190	0603200095


Unless otherwise specified, all dimensions are given in millimetres.

## Cetop 03 and Cetop 05 plates for incorporated valves


A3 series cylinders built to ISO 6020/2 standards can be supplied on request from bore 40 upwards with Cetop 03 and Cetop 05 plates for mounting piloting valves directly onto the cylinder.

The minimum strokes required for installation are 100 mm for the Cetop 03 plate and 150 mm for the Cetop 05 plate; for lower stroke measurements, suitable spacers can be supplied on request.

For more detailed information on this subject, please contact our Technical Department.

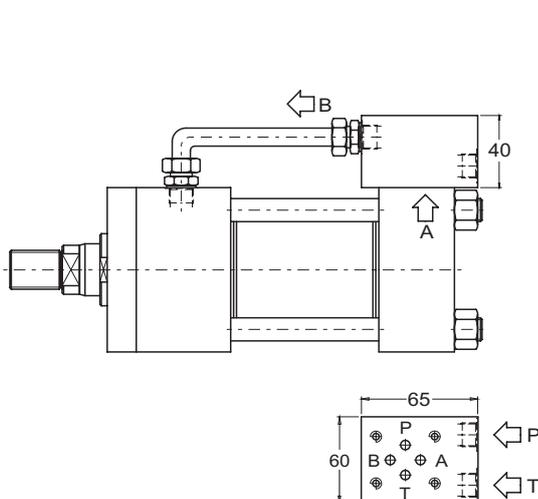

Cetop 03 plate (3/8" BSP P and T couplings)

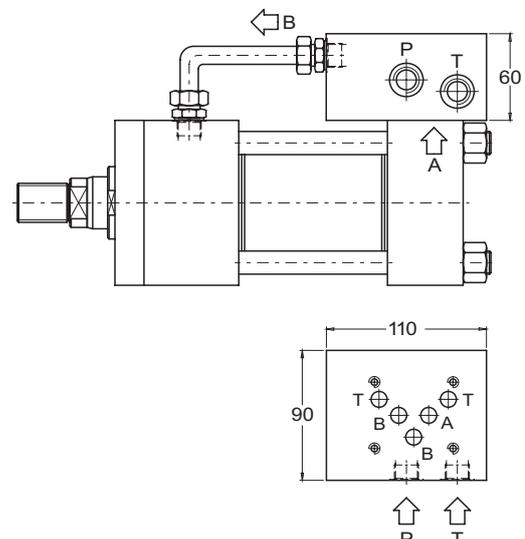

Cetop 05 plate (3/4" BSP P and T couplings)