
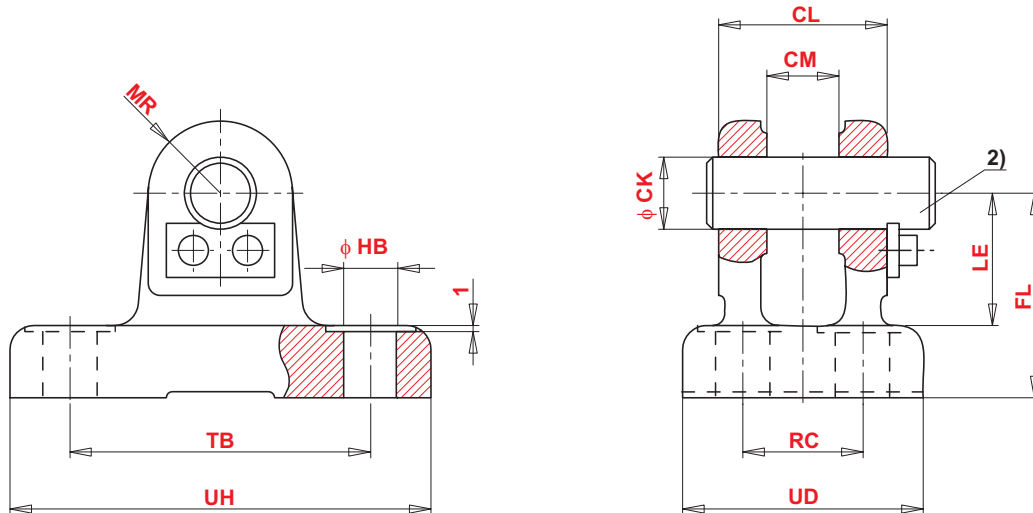


Clevis bracket

Form A
ISO 8132

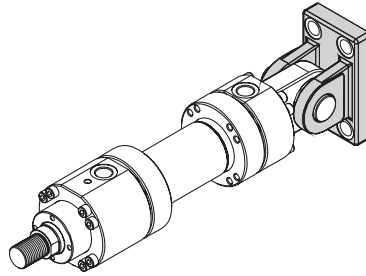

Bore \varnothing	Type	CK	CL	CM	FL	HB	LE	MR	RC	TB	UD	UH	Rated Force	$m^4)$	Ordering code
		H9	h16	A12	js12	H13	min	max	js14	js14	max	max			
mm		mm											kN	Kg	
25	PVA 12	12	28	12	34	9	22	12	20	50	40	70	8	0,31	077000012
32	PVA 16	16	36	16	40	11	27	16	26	65	50	90	12,5	0,59	077000016
40	PVA 20	20	45	20	45	11	30	20	32	75	58	98	20	0,90	077000020
50	PVA 25	25	56	25	55	13,5	37	25	40	85	70	113	32	1,60	077000025
63	PVA 32	32	70	32	65	17,5	43	32	50	110	85	143	50	2,80	077000032
80	PVA 40	40	90	40	76	22	52	40	65	130	108	170	80	5,00	077000040
100	PVA 50	50	110	50	95	26	65	50	80	170	130	220	125	10,10	077000050
125	PVA 63	63	140	63	112	33	75	63	100	210	160	270	200	15,40	077000063
160	PVA 80	80	170	80	140	39	95	80	125	250	210	320	320	30,00	077000080

Remarks:

2) = Associated pin \varnothing m6 (the pin and pin retention are included within the scope of supply)

4)_m = Weight of the fork type mounting block